

INDOOR UNITS



HIGH STATIC PRESSURE DUCTED

- 2 MODELS OF 22,4 AND 28 kW FOR LARGE AREAS
- STATIC PRESSURE ADJUSTABLE UP TO 200 Pa
- ACCESS PANELS FOR EASY MAINTENANCE

Description	Unit	TAD-VRFBUDC-224IT		TAD-VRFBUDC-280IT	
		Cooling	Heating	Cooling	Heating
Power supply	V/Ph/Hz	220-240/1/50		220-240/1/50	
Nominal capacity (EN14511)	kW	22,4	25,0	28,0	31,0
Air flow	m ³ /h	4000		4400	
Available static pressure	Pa	100 - (50-200)		100 - (50-200)	
Sound pressure (h.-m.-l)	dB(A)	54		55	
Sound power	dB(A)	64/62/59		65/62/60	
Liquid pipe diameter	mm (inch)	9,52 (3/8")		9,52 (3/8")	
Gas pipe diameter	mm (inch)	19,05 (5/8")		22,2 (7/8")	
Net dimensions (H./W./D.)	mm	385/1483/791		450/1686/870	
Net weight	Kg	82		105	



STATIC PRESSURE

High nominal external static pressure, which can be adjusted from 50 to 250 Pa, either manually or automatically: this feature is very important for applications requiring a very long air throw.


9 LEVELS

9 selectable static pressure levels, depending on the installation.

DUCTED UNIT CURVES

HIGH STATIC PRESSURE

MODEL
TAD-VRFBUC-224IT

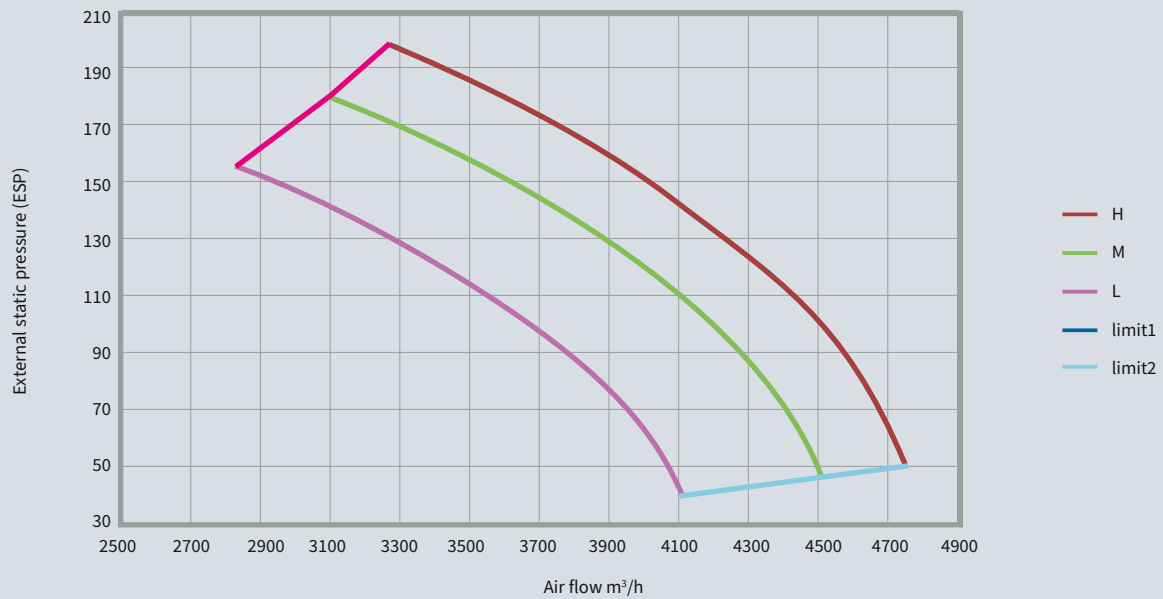

MODEL
TAD-VRFBUC-280IT

